

**CITY OF PLATTSBURG  
114W. MAPLE  
PLATTSBURG, MO. 64477  
816-539-2148**

**APPLICATION FOR PRIVATE SWIMMING POOL PERMIT  
ALL PRIVATE SWIMMING POOLS MORE THAN TWENTY FOUR (24)  
INCHES DEEP REQUIRES A PERMIT**

**DATE:** \_\_\_\_\_

**APPLICANT NAME:** \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**TELEPHONE NUMBER:** \_\_\_\_\_

**INSTALLER NAME:** \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**TELEPHONE NUMBER:** \_\_\_\_\_

1. POOL TYPE:  INGROUND  ABOVE GROUND

2. POOL DEPTH AT DEEPEST POINT: \_\_\_\_\_

3. POOL SIZE: \_\_\_\_\_ x \_\_\_\_\_

4. TYPE BARRIER:  FENCE FOURTY EIGHT (48) INCHES MINIMUM  
 CHAINLINK  PICKET  PRIVACY

FOUR (4) FOOT DECK AROUND POOL WITH FOURTY  
EIGHT (48) INCH RAILING AND SPINDLES FOUR (4)  
INCH ON CENTER

5. OWNER TO PROVIDE THE CITY A COPY OF THE MANUFACTURES  
SPECIFICATIONS AND INSTALLATION INSTRUCTIONS, THOSE SHALL  
COMPLY WITH THE **2006 INTERNATIONAL RESIDENTIAL CODE  
STANDARDS, CHAPTER FOURTY ONE (41) AND APPENDEX A.** IF THEY DO  
NOT THE INTERNATIONAL CODE STANDARDS SHALL BE USED.

6. FEE: \_\_\_\_\_ PERMIT NO. \_\_\_\_\_

**Good for you, Plattsburg!**

**City of Plattsburg**  
□ 114 W. Maple  
Plattsburg, Mo. 64477  
(816) 539-2148

### **Pool Inspection Checklist**

#### **Barrier Requirements:**


- The top of the barrier must be at least 48 inches above grade
- The maximum space between bottom of barrier and grade level shall be 2 inches
- On an above-ground pool where the barrier is mounted on top of the pool structure, the spacing between the bottom of the barrier and the top of the pool structure shall be a maximum of 4 inches.
- Openings between spindles in the barrier shall not allow passage of a 4 inch sphere
- Spacing between spindles shall not exceed 3 3/4 inches in width (Decorative cutouts apply also)
- Chain link fence used as a barrier shall have maximum mesh size of 3 3/4 inches
- Gates shall be equipped to accommodate a locking device
- Gate shall have a self-latching device where the self-latching device is placed less than 54 inches from bottom of gate then 1) the release mechanism must be located on the pool side of the gate at least 3 inches below top of gate and 2) barrier shall have no opening greater than ½ inch within 18 inches of the release mechanism.

#### **Electrical Requirements:**

- All metal less than 5 feet from pool must be bonded with 8 AWG copper
- Only pool-associated conduit within 5 feet of inside wall of pool
- Non-pool associated conduit o.k. if space is limited & in rigid metal at minimum 6 inch deep or PVC 18 inches deep
- Overhead wire can be no closer than 18 feet from water
- Overhead wire can be no closer than 14 feet from diving board
- Maximum length of cord on pool equipment is 3 feet with 12 AWG ground
- GFI-protected lighting must be less than 10 feet from water's edge
- GFI outlets cannot be closer than 10 feet and farther than 20 feet from pool walls
- No poolside outlets placed less than 10 feet from water's edge
- All grade-accessible outlets must be GFI-protected excluding inside house
- Pump Motor-if greater than 5 feet and less than 10 feet from pool walls must have a twist lock receptacle and GFI protection

**Good for you, Plattsburg!**

House/YARD  
PLATT FOR POOL

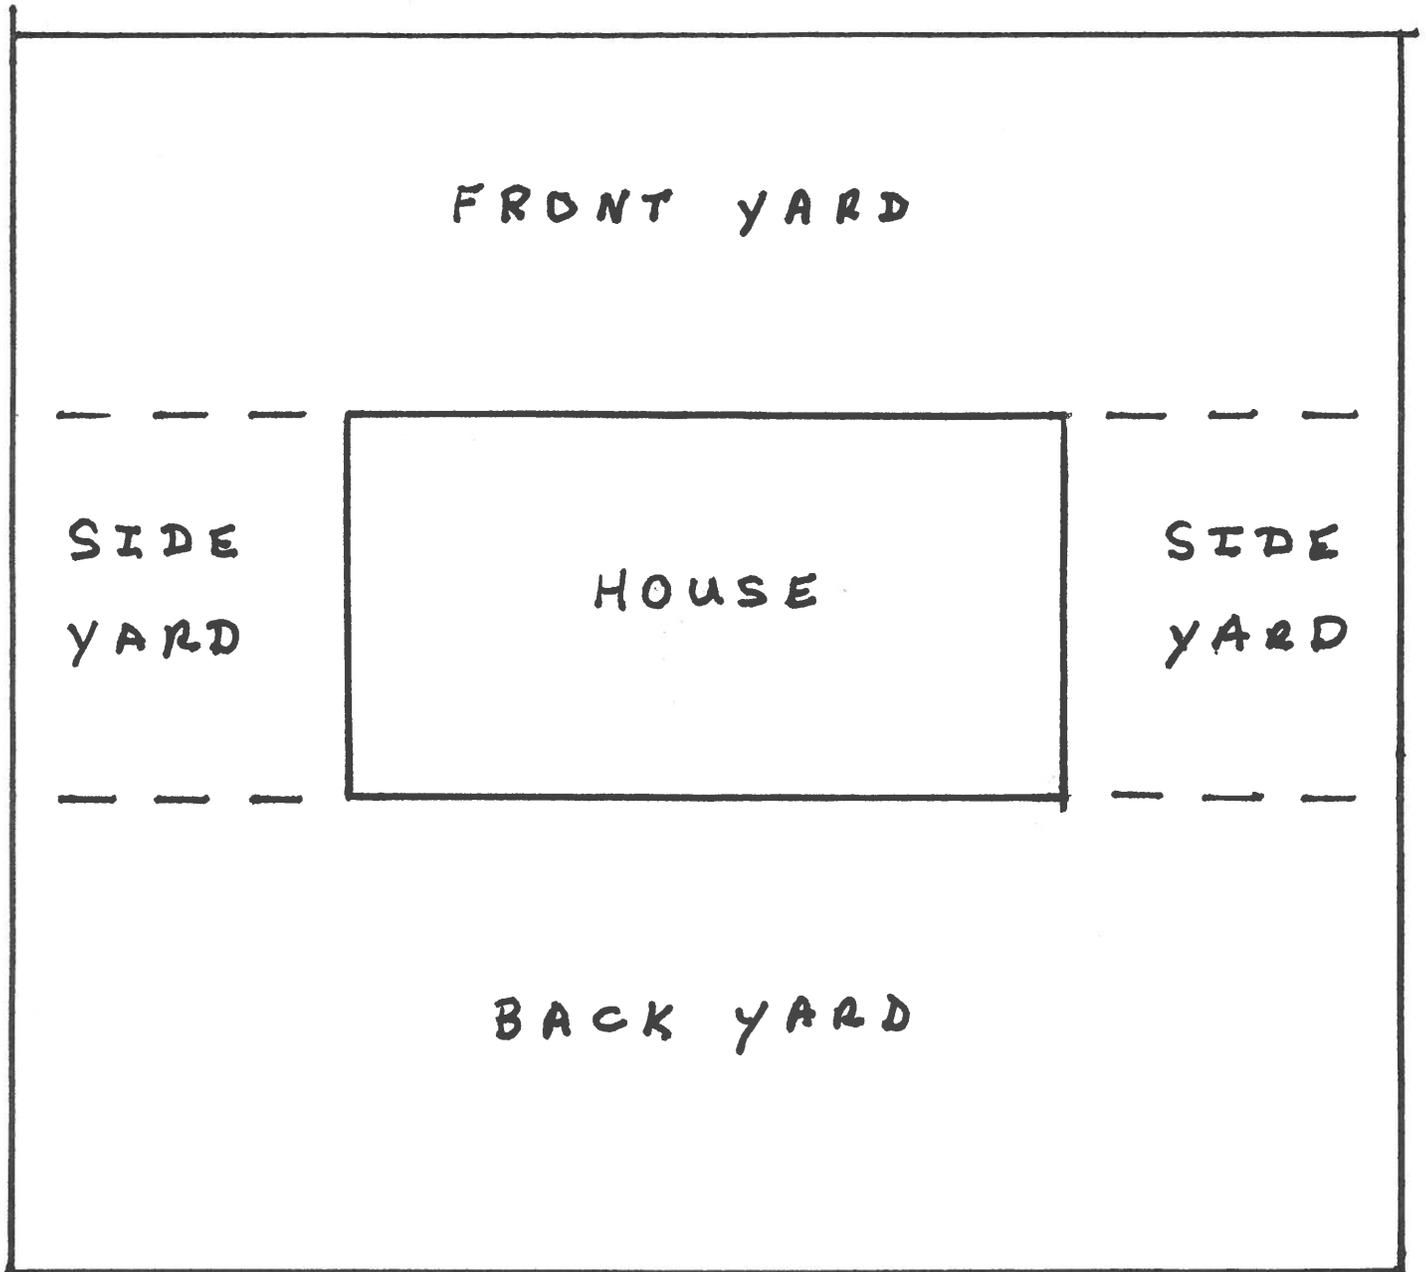

SWIMMING POOL MAY BE  
INSTALLED IN SIDE OR BACK  
YARD ONLY IF AREA PERMITTS

NO POOL WILL BE PERMITTED  
IN FRONT YARD